


# HD-SL SERIES-LED

(10 YEAR WARRANTY)

## PRODUCT TECHNICAL DATA SHEET

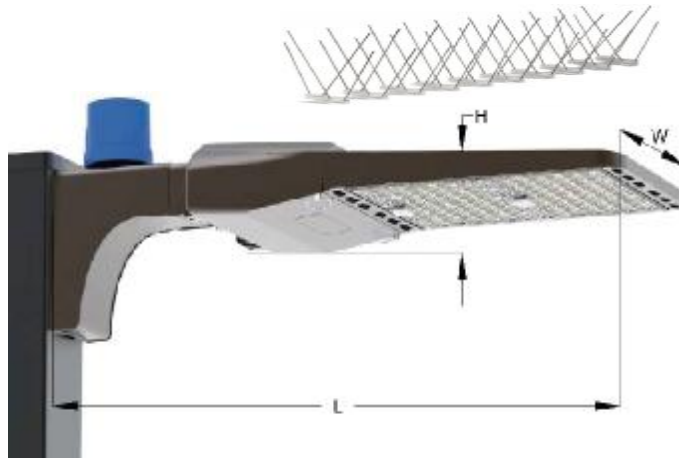

"L1"

### Specification Features

- Up to 68,000 Lumens
- Color Temperature 3000K/4000K/5000K
- Lumen Efficacy: 140 Lm/W
- CRI > 80
- Die-Cast aluminum housing
- Quick disconnect driver system
- 1-10V dimmable optional
- Bird Spikes option
- Twist lock photocell optional
- Suitable for wet locations, IP66
- IES II, III, IV and V
- Manufacturer Warranty: 10 years
- Working Temperature: -40°C ~ + 55°C
- Bronze powder coated finish (RAL 8019)
- Consult manufacturer for mounting options

Sizes	L	W	H
Large	30"	12"	4-1/8"
Medium	24"	12"	3-5/8"
Small	17"	12"	3-1/2"

## HD-SL-S-40W-5600Lm-4000K-120V-III-PEC-HSS-BLACK

HD-SL SERIES							
Product #	INPUT WATTAGE	LUMEN OUTPUT	COLOR TEMPERATURE	VOLTAGE	OPTICS	OPTIONS	COLOR
HD-SL-L	500W 400W	68000 Lm 56000 Lm					
HD-SL-M	300W 240W	41400 Lm 28800 Lm	3000K 4000K 5000K	120V ~ 277V  240V ~ 480 V (347V)	IES Type II, III, IV and V	PEC- Twist Lock Photocell Optional	RAL 8019 Bronze
HD-SL-S	185W 150W 100W 80W 40W	25160 Lm 21000 Lm 14000 Lm 11200 Lm 5600 Lm				BS- Bird Spikes  HSS House Side Shield	